


TD ピストンシール

(T社: グライドリング、KYB社: Dシール互換品)

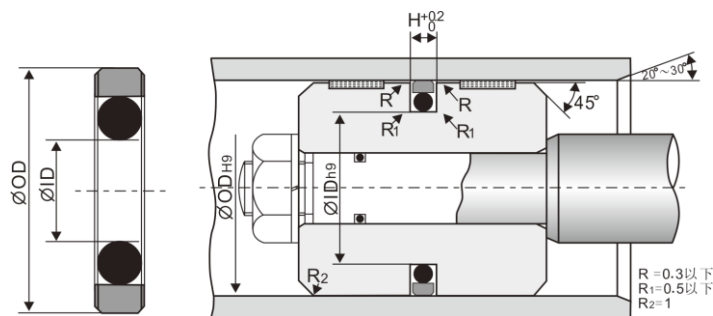


仕様	
材質	PTFE+NY+NBR
温度域	-40°C~110°C
圧力	500kgf/cm ²
速度	1.5m/s

単位: mm

商品コード	型番	OD	ID	H
1010-00420	TD 018-3.2	18	10.5	3.2
1010-00421	TD 020-3.2	20	12.5	3.2
1010-00422	TD 022-3.2	22	14.5	3.2
1010-00423	TD 024-3.2	24	16.5	3.2
1010-00424	TD 028-3.2	28	20.5	3.2
1010-00425	TD 030-3.2	30	22.5	3.2
1010-00426	TD 032-3.2	32	24.5	3.2
1010-00427	TD 038-3.2	38	30.5	3.2
1010-00430	TD 040-4.2	40	29	4.2
1010-00428	TD 044.45-3.2	44.45	36.95	3.2
1010-00440	TD 045-4.2	45	34	4.2
1010-00450	TD 050-4.2	50	39	4.2
1010-00510	TD 050-6.3	50	34.5	6.3
1010-00429	TD 050.8-3.2	50.8	43.3	3.2
1010-00460	TD 055-4.2	55	44	4.2
1010-00520	TD 055-6.3	55	39.5	6.3
1010-00470	TD 060-4.2	60	49	4.2
1010-00530	TD 060-6.3	60	44.5	6.3
1010-00480	TD 063-4.2	63	52	4.2
1010-00535	TD 063-6.3	63	47.5	6.3
1010-00490	TD 065-4.2	65	54	4.2
1010-00540	TD 065-6.3	65	49.5	6.3
1010-00500	TD 070-4.2	70	59	4.2
1010-00550	TD 070-6.3	70	54.5	6.3
1010-00501	TD 075-4.2	75	64	4.2
1010-00560	TD 075-6.3	75	59.5	6.3
1010-00503	TD 076.2-4.2	76.2	65.2	4.2
1010-00505	TD 080-4.2	80	69	4.2
1010-00570	TD 080-6.3	80	64.5	6.3
1010-00680	TD 080-8.1	80	59	8.1
1010-00580	TD 085-6.3	85	69.5	6.3
1010-00690	TD 085-8.1	85	64	8.1
1010-00507	TD 090-4.2	90	79	4.2
1010-00590	TD 090-6.3	90	74.5	6.3
1010-00700	TD 090-8.1	90	69	8.1
1010-00600	TD 095-6.3	95	79.5	6.3
1010-00710	TD 095-8.1	95	74	8.1
1010-00610	TD 100-6.3	100	84.5	6.3

TD ピストンシール

(T社: グライドリング、KYB社: Dシール互換品)

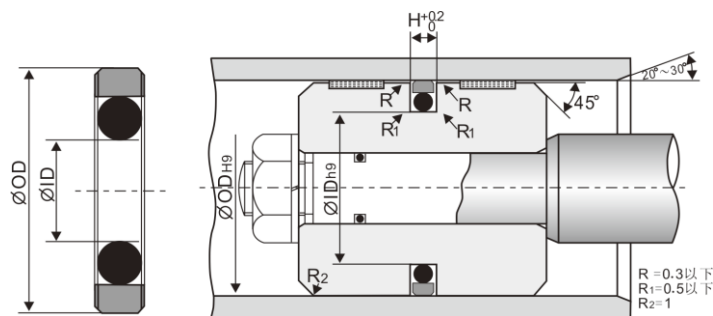


仕様	
材質	PTFE+NY+NBR
温度域	-40°C~110°C
圧力	500kgf/cm ²
速度	1.5m/s

単位: mm

商品コード	型番	OD	ID	H
1010-00615	TD 100-6.3溝付	100	84.5	6.3
1010-00720	TD 100-8.1	100	79	8.1
1010-00620	TD 105-6.3	105	89.5	6.3
1010-00730	TD 105-8.1	105	84	8.1
1010-00630	TD 110-6.3	110	94.5	6.3
1010-00740	TD 110-8.1	110	89	8.1
1010-00640	TD 115-6.3	115	99.5	6.3
1010-00750	TD 115-8.1	115	94	8.1
1010-00650	TD 120-6.3	120	104.5	6.3
1010-00760	TD 120-8.1	120	99	8.1
1010-00660	TD 125-6.3	125	109.5	6.3
1010-00770	TD 125-8.1	125	104	8.1
1010-00670	TD 130-6.3	130	114.5	6.3
1010-00780	TD 130-8.1	130	109	8.1
1010-00790	TD 135-8.1	135	114	8.1
1010-00672	TD 140-6.3	140	124.5	6.3
1010-00800	TD 140-8.1	140	119	8.1
1010-00673	TD 145-6.3	145	129.5	6.3
1010-00810	TD 145-8.1	145	124	8.1
1010-00675	TD 150-6.3	150	134.5	6.3
1010-00820	TD 150-8.1	150	129	8.1
1010-00830	TD 155-8.1	155	134	8.1
1010-00677	TD 160-6.3	160	144.5	6.3
1010-00840	TD 160-8.1	160	139	8.1
1010-00850	TD 165-8.1	165	144	8.1
1010-00860	TD 170-8.1	170	149	8.1
1010-00865	TD 175-8.1	175	154	8.1
1010-00679	TD 180-6.3	180	164.5	6.3
1010-00870	TD 180-8.1	180	159	8.1
1010-00880	TD 185-8.1	185	164	8.1
1010-00890	TD 190-8.1	190	169	8.1
1010-00900	TD 200-8.1	200	179	8.1
1010-00910	TD 210-8.1	210	189	8.1
1010-00920	TD 220-8.1	220	199	8.1
1010-00921	TD 225-8.1	225	199	8.1
1010-00922	TD 225-8.1	225	204	8.1
1010-00927	TD 230-8.1	230	209	8.1
1010-00923	TD 240-8.1	240	219	8.1
1010-01000	TD 250-8.1	250	229	8.1
1010-01010	TD 260-8.1	260	239	8.1

TD ピストンシール

(T社: グライドリング、KYB社: Dシール互換品)

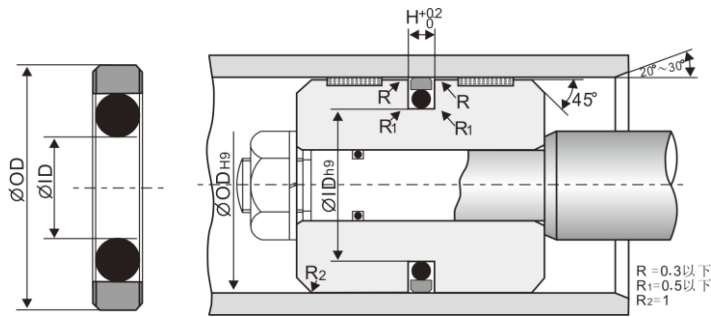

仕様	
材質	PTFE+NY+NBR
温度域	-40°C~110°C
圧力	500kgf/cm ²
速度	1.5m/s

単位: mm

商品コード	型番	OD	ID	H
1010-01020	TD 270-8.1	270	249	8.1
1010-01030	TD 280-8.1	280	259	8.1
1010-01035	TD 280-8.8	280	260	8.8
1010-01040	TD 290-8.1	290	269	8.1
1010-01050	TD 300-8.1	300	279	8.1
1010-01060	TD 310-8.1	310	289	8.1
1010-01070	TD 320-8.1	320	299	8.1
1010-01080	TD 330-8.1	330	305.5	8.1
1010-01090	TD 340-8.1	340	315.5	8.1
1010-01100	TD 350-8.1	350	325.5	8.1