


FB2 バッファシール (NOK社:HBY バッファリング互換品)

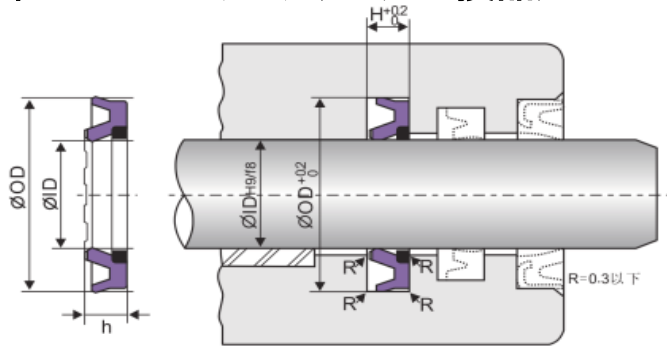

仕様	
材質	PU+NY
温度域	-40°C~120°C
圧力	400kgf/cm ²
速度	1m/s

※耐高温タイプPU(紫)

単位: mm

商品コード	型番	ID	OD	h	H
1310-00160	FB2-40-50.7-3.9	40	50.7	3.9	
1310-00180	FB2-45-55.7-3.9	45	55.7	3.9	
1310-00205	FB2-50-60.7-3.9	50	60.7	3.9	
1310-00215	FB2-55-65.7-3.9	55	65.7	3.9	
1310-00225	FB2-60-70.7-3.9	60	70.7	3.9	
1310-00170	FB2-40-55.5-6	40	55.5	6	6.3
1310-00190	FB2-45-60.5-6	45	60.5	6	6.3
1310-00200	FB2-50-65.5-6	50	65.5	6	6.3
1310-00210	FB2-55-70.5-6	55	70.5	6	6.3
1310-00220	FB2-56-71.5-6	56	71.5	6	6.3
1310-00230	FB2-60-75.5-6	60	75.5	6	6.3
1310-00240	FB2-63-78.5-6	63	78.5	6	6.3
1310-00250	FB2-65-80.5-6	65	80.5	6	6.3
1310-00260	FB2-70-85.5-6	70	85.5	6	6.3
1310-00270	FB2-75-90.5-6	75	90.5	6	6.3
1310-00280	FB2-80-95.5-6	80	95.5	6	6.3
1310-00290	FB2-85-100.5-6	85	100.5	6	6.3
1310-00300	FB2-90-105.5-6	90	105.5	6	6.3
1310-00310	FB2-95-110.5-6	95	110.5	6	6.3
1310-00320	FB2-100-115.5-6	100	115.5	6	6.3
1310-00330	FB2-105-120.5-6	105	120.5	6	6.3
1310-00340	FB2-110-125.5-6	110	125.5	6	6.3
1310-00350	FB2-115-130.5-6	115	130.5	6	6.3
1310-00360	FB2-120-135.5-6	120	135.5	6	6.3
1310-00370	FB2-130-145.5-6	130	145.5	6	6.3
1310-00380	FB2-135-150.5-6	135	150.5	6	6.3
1310-00390	FB2-138-153.1-6	138	153.1	6	6.3
1310-00400	FB2-140-155.5-6	140	155.5	6	6.3
1310-00410	FB2-145-160.5-6	145	160.5	6	6.3
1310-00420	FB2-150-165.5-6	150	165.5	6	6.3
1310-00430	FB2-155-170.5-6	155	170.5	6	6.3
1310-00440	FB2-160-175.5-6	160	175.5	6	6.3
1310-00450	FB2-170-185.5-6	170	185.5	6	6.3
1310-00460	FB2-180-195.5-6	180	195.5	6	6.3